





ZDV 1200

kW 3.36
Hp 4.48

Hm 19.0 max
L/I' 1165 max

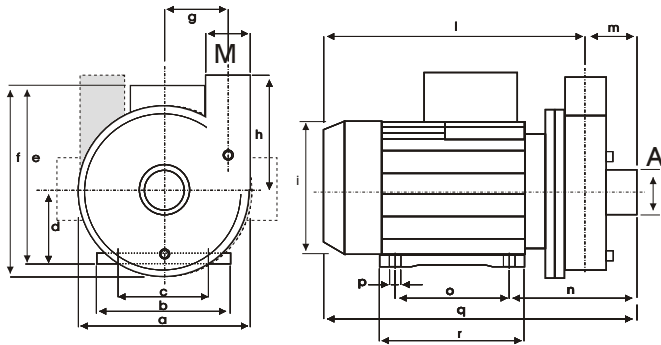

mod	a	b	c	d	e	f	g	h	i	l	m	n	o	p	q	r	kg
ZDV 1200	225	170	140	90	200	215	90	130	178	320	56	150	121	10,5	376	153	19,6

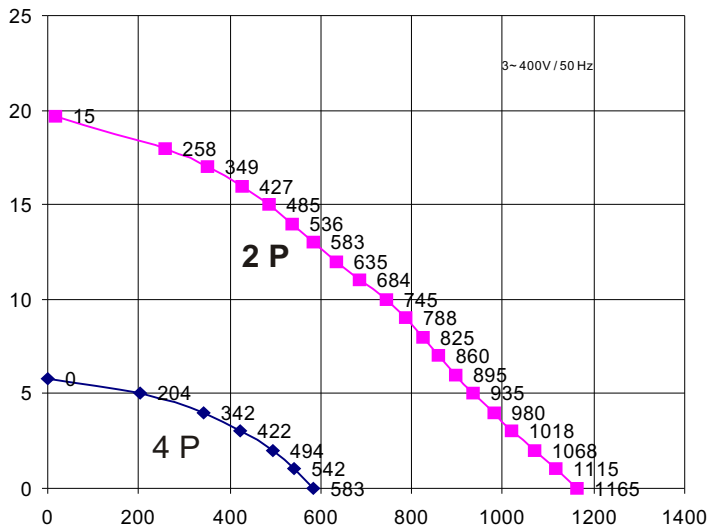

Hm	0	2	4	6	8	9	10	12	14	16	18	20
L/I'	1165	1068	980	895	825	788	745	635	536	427	258	0

Hm	0	1	2	3	4	5	5,8
L/I'	583	542	494	422	342	204	0

Ci riserviamo il diritto di apportare modifiche tecniche

We reserve the right of technical modifications

Technische Änderungen vorbehalten

Corpo Pompa
Pump Body
Pumpengehäuse

PA 66 30GF

Girante Aperta
Open Impeller
Offenes Laufrad

SPS G 30

Albero Motore
Motor Shaft
Motorwelle

AISI 316 / C40

Tenuta Meccanica
Mechanical Seal
Gleitringdichtung

GRAFITE/CERAMICA
CARBON/CERAMIC
KOHLE/KERAMIK

Potenza motore
Motor power
Motor Leistung

2 poli
poles
Pole

Hp
4,3

kW
3,2

Potenza motore
Motor power
Motor Leistung

4 poli
poles
Pole

Hp
0,59

kW
0,8

SX	A	M	DX	A	M
L11:	60	60	L11:	60	60
L12:	70	60	L12:	70	60
F5:	2½"	2"	F5:	2½"	2"

Tensione/Frequenza
Tension/Frequency
Spannung/Frequenz

3~V/Hz
400/50

Corrente assorbita
Power consumption
Stromaufnahme

2 poli
poles
Pole

A
4,93

Corrente assorbita
Power consumption
Stromaufnahme

4 poli
poles
Pole

A
2,30

GPM
RPM
UPM

2 poli
poles
Pole

2800
4 poli
poles
Pole

Protezione termica
Thermal Overload
Überlastschutz

160 °C

Classe isolamento
Insulation class
Isolationsklasse

F

Grado protezione
Protection class
Schutzklasse

IP 44

Servizio
Duty
Betriebsart

S1

CONTINUO
CONTINUOUS
DAUERBETRIEB

REV. N.00.07/04 P. 03/012-013/014-015